
Fully Automatic Strapping Machine in Stainless Steel for cross strapping

■ **RQ-8ARCS features the Turning Device on the top of the Arch Unit which rotates packages for cross strapping.**

■ **Servo Motor on the Turning Device enables to rotate packages of various dimensions.**

■ **The Body and sealing components are either moisture proof or made of stainless steel.**



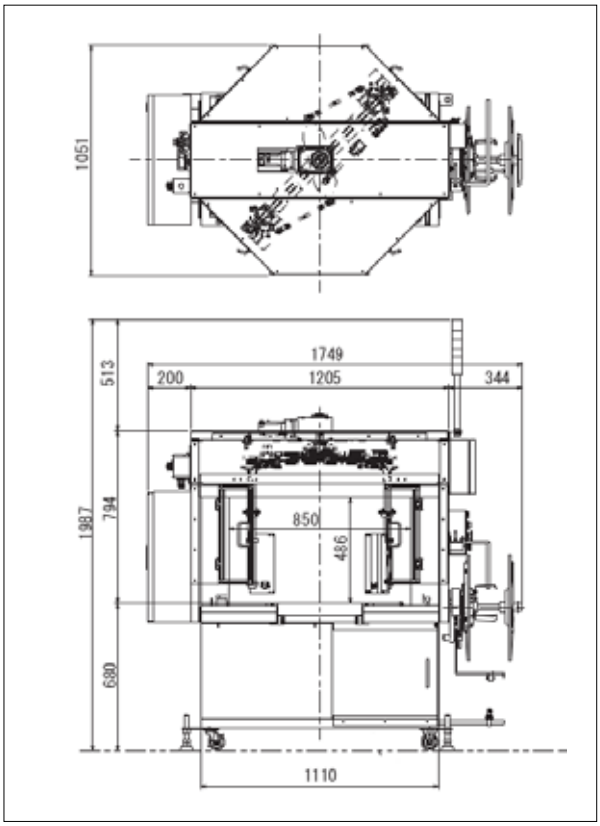

RQ-8ARCS SUS

Example of Specifications

Dimension	**Width**	1749 mm
	Height	1987 mm
	Depth	1051 mm
	Weight	350 kg
Arch Size		W 850 X H 500 mm
Package Size		W 250 X D 300 X H 130 mm
Strapping		2 parallel / Cross strap / 2 parallel and Cross strap
Joint / Strap		heat seal / polypropylene
Strap		5, 6, 9, 12, 15.5 mm
Strap Tension		450 N (46 kgf) *CE Spec.
Power Supply		Three phase 50/60Hz 0.74kVA

Dimensions and specifications are subject to change without notice.
Modification rights reserved.

© 2020 Strapack Corporation

DISTRIBUTED BY:

ISO 9001 and 14001 Certified

STRAPACK CORPORATION
8-16-6 Ginza, Chuo-ku, Tokyo, 104-0061, JAPAN
Phone 81-3-6278-1806 Fax. 81-3-6278-1807
(URL) http://www.strapack.com (E-mail) info@strapack.com
STRAPACK INC.
33508 Central Avenue, Union City, CA 94587-2097 U.S.A.
Phone: 1-510-475-6000 Fax: 1-510-475-6090
STRAPACK, N.V./S.A.
Uilenbaan 200, B-2160 Wommelgem, BELGIUM
Phone: 32-3-355-1520 Fax: 32-3-355-1521